


TRACK CONDITIONS

Type: Carpet Asphalt
 Place: Indoor Outdoor
 Surface: Smooth Med. Bumpy
 Note: _____

Size: Open Med. Tight
 Traction: High Med. Low
 Track Temp/Air Temp: _____ / _____


FRONT SUSPENSION

Track Width: _____ mm Gear Diff _____ wt
 Toe Angle: _____ ° Solid Axle (Spool)
 Caster: _____ ° One Way
 Camber: 1.5 °
 Ride Height: 5.0 mm Anti-Roll Bar: \varnothing 1.4 mm
 Down Stop: 6 mm

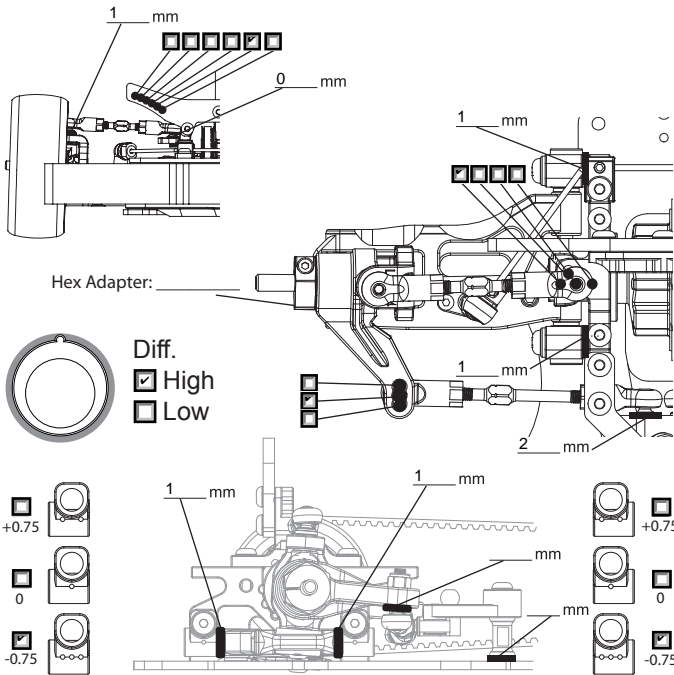


REAR SUSPENSION


Track Width: _____ mm Gear Diff 800 wt
 Toe Angle: _____ °
 Camber: 2 °
 Ride Height: 5.0 mm
 Down Stop: 5 mm Anti-Roll Bar: \varnothing 1.2 mm

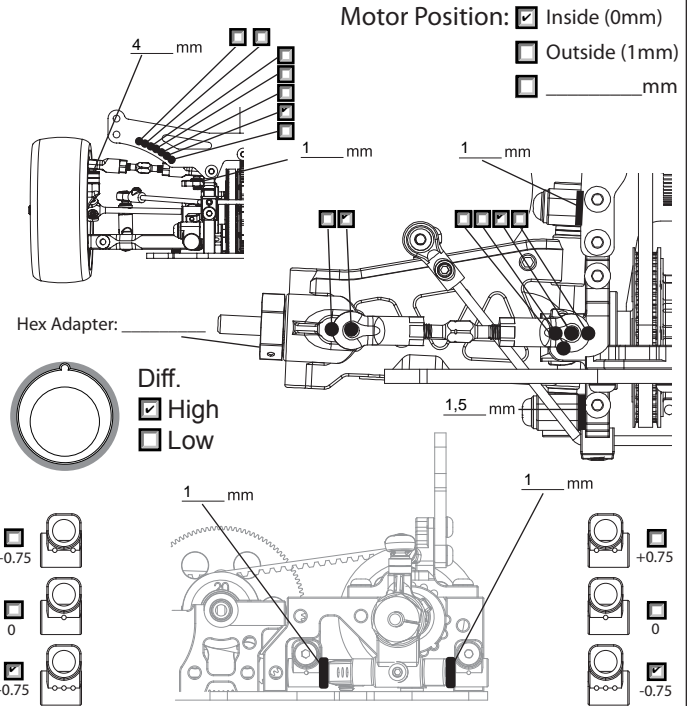

STIFF SETTING



Upper Deck: 2.0mm 2.3mm 2.5mm

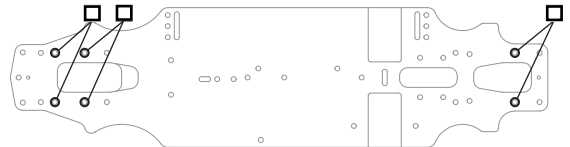

Chassis: 2.3mm 2.5mm 3.0mm

ELECTRONICS

Servo: Sanwa
 ESC: LRP
 Battery: Boomerang

DRIVE RATIO


Spur 110_T
 Pinion 41_T $\times 1.9 =$ 5.10

MOTOR


Brand: LRP X20
 Turns: 13,5
 Timing: °°°°

TIRES

Insert: Ride
 Wheel: Ride
 Shore/deg: --
 Compound: --
 Tire Temp: --
 Tire additive: --
 Treated Area



SHOCKS




Hole Size: F 1,1 R 1,1
 Holes In Piston: F 3 R 3
 Oil wt: F 40 R 40
 Springs: F HB Silber R HB Silber
 Rebound: F 10% R 10%
 Bladder Note: _____
 Thread Length: F R

ESC

Punch: 0 Boost
 Initial Brake: _____
 Drag Brake: _____
 ESC Timing Turbo Timing

BODY



Body: PF Mazda Speed 6
 Wing Height: _____
 Wing Position: _____