


TRACK CONDITIONS

Type: Carpet Asphalt
 Place: Indoor Outdoor
 Surface: Smooth Med. Bumpy
 Size: Open Med. Tight
 Traction: High Med. Low
 Track Temp/Air Temp: _____ / _____

Note: 3rd heat fastest overall lap.


FRONT SUSPENSION

Track Width: _____ mm Gear Diff _____ wt
 Toe Angle: 0,5 ° Solid Axle (Spool)
 Caster: 1,5 ° One Way
 Camber: 4 °
 Ride Height: 5,2 mm Anti-Roll Bar: \varnothing 1,4 mm
 Down Stop: 6 mm

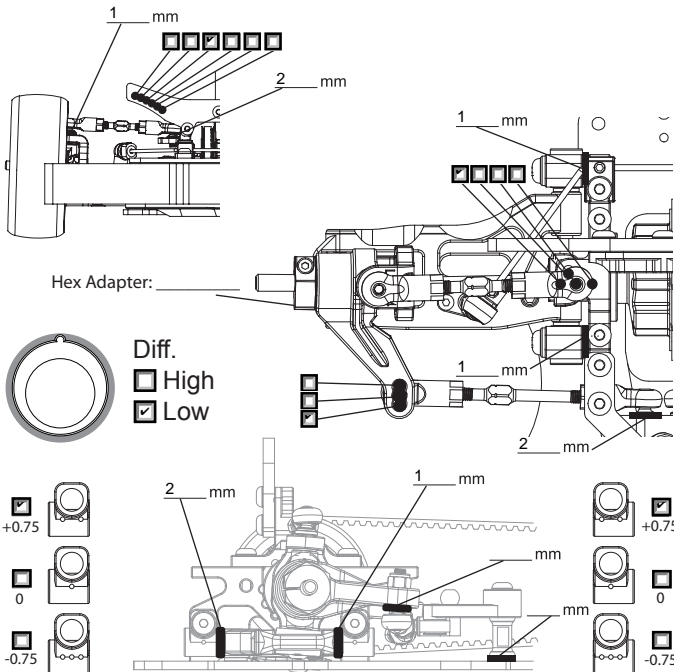


REAR SUSPENSION

Track Width: _____ mm Gear Diff 3000 wt
 Toe Angle: 3 °
 Camber: 2 °
 Ride Height: 5,5 mm
 Down Stop: 3 mm Anti-Roll Bar: \varnothing 1,2 mm

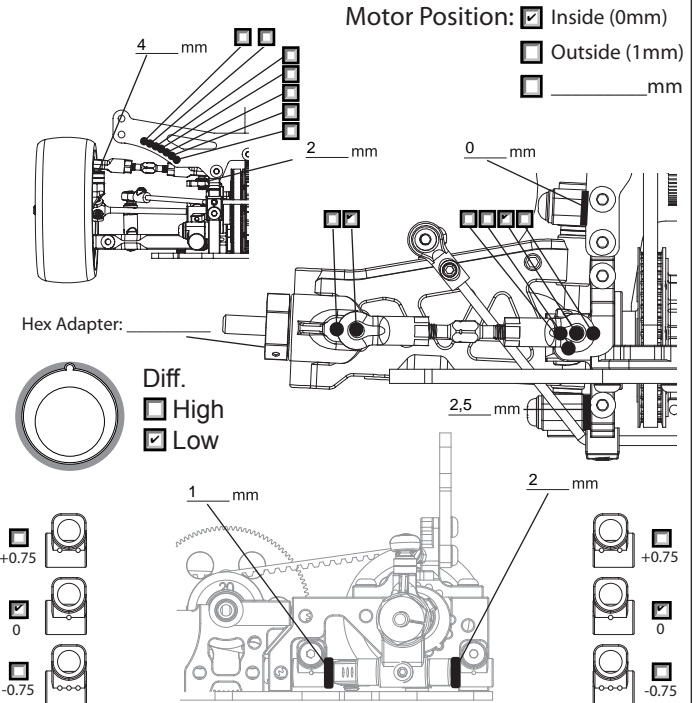

STIFF SETTING

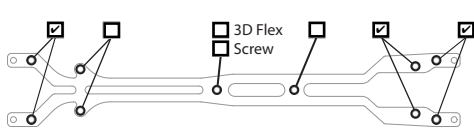

Upper Deck: 2.0mm 2.3mm 2.5mm



Chassis: 2.3mm 2.5mm 3.0mm

ELECTRONICS

Servo: BLS 551
 ESC: SXX V2
 Battery: Orion

DRIVE RATIO


Spur 100 T
 Pinion 40 T $\times 1.9 =$ 4.75

MOTOR


Brand: X20 10,5
 Turns: _____
 Timing: _____

TIRES

Insert: _____
 Wheel: _____
 Shore/deg: _____
 Compound: _____
 Tire Temp: _____
 Tire additive: _____
 Treated Area



SHOCKS




Hole Size: F 3 R 3
 Holes In Piston: F 1,2 R 1,2
 Oil wt: F 600 R 400
 Springs: F 27 R 25
 Rebound: F 50% R 50%
 Bladder Note: -
 Thread Length: F R

ESC

Punch: _____
 Initial Brake: 0
 Drag Brake: 0
 ESC Timing Turbo Timing

BODY



Body: LTC-R LW
 Wing Height: limit
 Wing Position: 10mm