


TRACK CONDITIONS

Type: Carpet Asphalt
 Place: Indoor Outdoor
 Surface: Smooth Med. Bumpy
 Size: Open Med. Tight
 Traction: High Med. Low
 Track Temp/Air Temp: _____ / _____

Note: use RF Arm mount with 0,5mm and cut the bulks like the pro tips


FRONT SUSPENSION

Track Width: _____ mm Gear Diff _____ wt
 Toe Angle: 1 ° Solid Axle (Spool)
 Caster: 4 ° One Way
 Camber: 1 °
 Ride Height: 5,2 mm Anti-Roll Bar: \varnothing 1,6 mm
 Down Stop: 5,6 mm

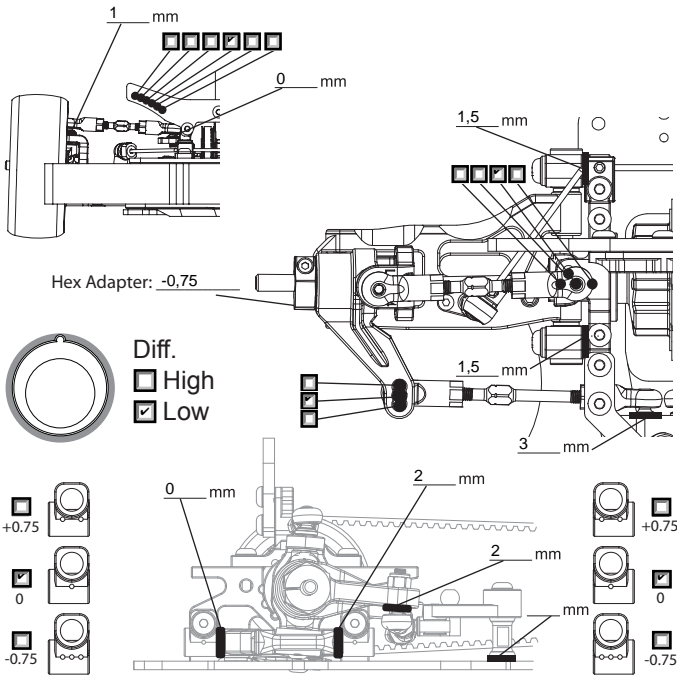


REAR SUSPENSION

Track Width: _____ mm Gear Diff 5000 wt
 Toe Angle: 2,75 °
 Camber: 2 °
 Ride Height: 5,4 mm
 Down Stop: 4,8 mm Anti-Roll Bar: \varnothing 1,2 mm

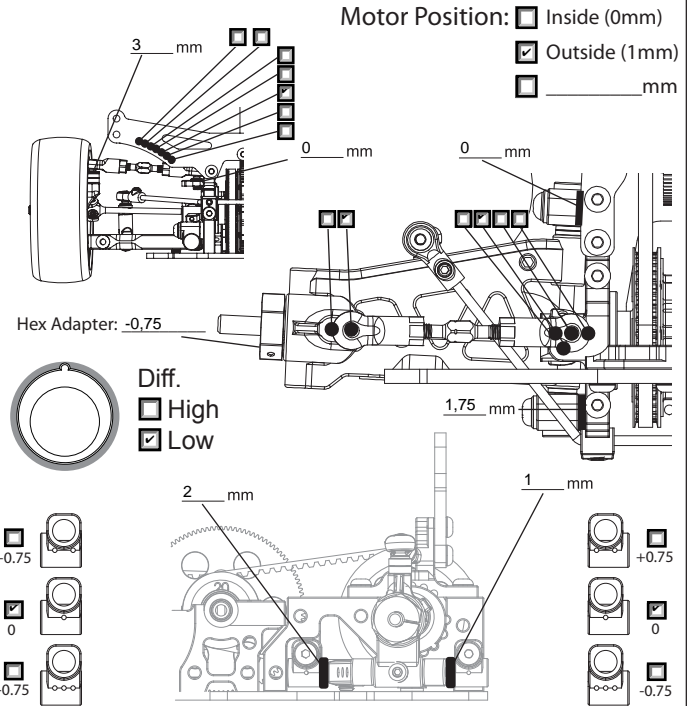

STIFF SETTING



Upper Deck: 2.0mm 2.3mm 2.5mm



Chassis: 2.3mm 2.5mm 3.0mm

ELECTRONICS

Servo: Futaba
 ESC: Fleta
 Battery: Orion

DRIVE RATIO


Spur 100 T
 Pinion 38 T $\times 1.9 = 5.00$

MOTOR


Brand: ETS
 Turns: 13,5
 Timing: 0

TIRES

Insert: Ride
 Wheel: Ride
 Shore/deg: Ride
 Compound: Ride
 Tire Temp: _____
 Tire additive: Hudy
 Treated Area



SHOCKS




Hole Size: F 1,1 R 1,1
 Holes In Piston: F 3 R 3
 Oil wt: F 450 R 450
 Springs: F yok pink R yok blue
 Rebound: F 25 R 25
 Bladder Note: kit
 Thread Length: F R

ESC

Punch: 9
 Initial Brake: 0
 Drag Brake: 0
 ESC Timing Turbo Timing

BODY



Body: LTC-R LW
 Wing Height: limit
 Wing Position: limit