



TRACK CONDITIONS

Type: ☐ Carpet ☐ Asphalt Size: ☐ Open ☐ Med. ☐ Tight

Place: ☐ Indoor ☐ Outdoor Traction: ☐ High ☐ Med. ☐ Low

Surface: ☐ Smooth ☐ Med. ☐ Bumpy Track Temp/Air Temp: _____ / _____

Note: _____

FRONT SUSPENSION

Track Width: _____ mm ☐ Gear Diff _____ wt


Toe Angle: _____ ° ☐ One Way

Caster: _____ ° ☐ Spool

Camber: _____ °

Ride Height: _____ mm Anti-Roll Bar: Ø _____ mm

Down Stop: _____ mm

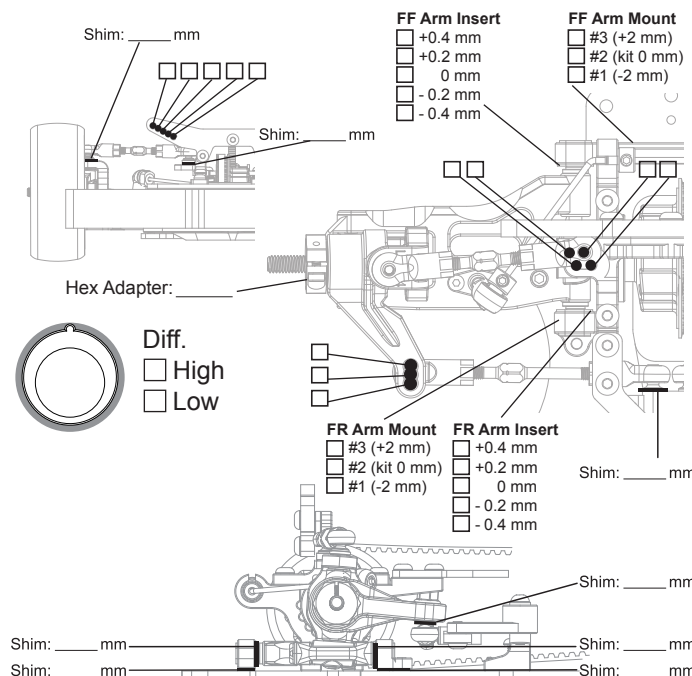

REAR SUSPENSION




Track Width: _____ mm ☐ Gear Diff _____ wt

Toe Angle: _____ °


Camber: _____ °

Ride Height: _____ mm

Down Stop: _____ mm Anti-Roll Bar: Ø _____ mm

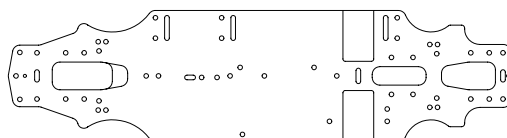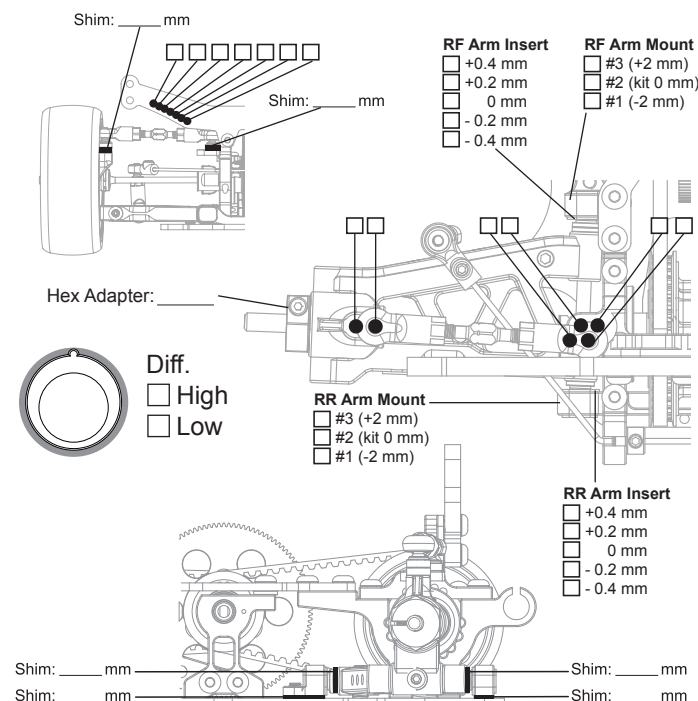

Chassis: ☐ 2.3 mm ☐ 2.5 mm ☐ Aluminum

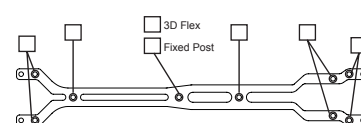

Upper Deck: ☐ 2 mm ☐ 2.3 mm ☐ 2.5 mm

ELECTRONICS

Servo: _____

ESC: _____

Battery: _____

MOTOR

Brand: _____

Turns: _____

Timing: _____

ESC

Punch: _____

Initial Brake: _____

Drag Brake: _____

☐ ESC Timing ☐ Turbo Timing

DRIVE RATIO

Spur $\frac{T}{T} \times 1.9 =$

Pinion _____

TIRES

Insert: _____

Wheel: _____


Shore/deg: _____

Compound: _____


Tire Temp: _____

Tire additive: _____

Treated Area



SHOCKS



Hole Size: F _____ R _____

Holes In Piston: F _____ R _____

Shock Oil WT: F _____ R _____

Shock Springs: F _____ R _____

Shock Rebound: F _____ R _____

Bladder Note: _____

Thread Length: F _____ R _____

Shock Length: F _____ R _____

BODY

Body Position: _____ Body: _____

Wing Height: _____

Wing Position: _____